

# 摩擦型扭力限制器 Friction Type Torque Limiter




SS350 - 1 C


聯軸器型  
Coupling type

- 1. 單片彈簧 - Single Disc Spring
- 2. 雙片彈簧 - Double Disc Springs.

產品規格  
MODEL

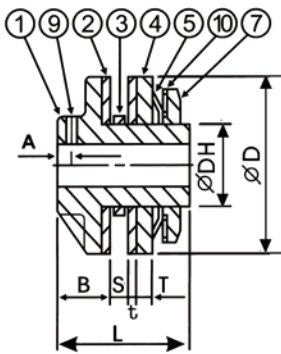

SS200.SS250.SS350

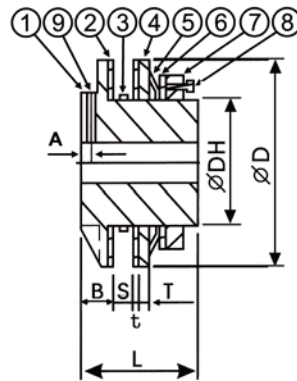

SS500.SS700

部品名稱 / Parts

- ① 輪殼 / Hub
- ② 磨擦板 / Friction Disc.
- ③ 軸襯 / Bushing
- ④ 壓力板 / Pressure Disc.
- ⑤ 盤式彈簧 / Disc. Spring
- ⑥ 導板 / Guideway
- ⑦ 調整螺母 / Adjusting Nut
- ⑧ 調整螺栓 / Adjust Bolt
- ⑨ 固定螺絲 / Fixing Screw
- ⑩ 鎖緊墊圈 / Lock Washer

## ◆尺寸 / Dimension

尺寸單位：mm

規格 No.	扭力範圍 Torque Range Kgf.m	標準孔徑 Stock Bore mm	最大孔徑 Max. Bore mm	軸襯長度 Bushing length	軸襯外徑 Bushing outside diameter	中心構件孔徑 Central Member Bore	D	DH	L	B	T	t	S 最大	A	C	調整螺母 Adjust Nut	調整螺栓 Adjust Bolt	固定螺絲 Fixing Screw	重量 Weight (Kg)
SS200-1	0.3~1	8	14	3.6	30 <sup>-0.024</sup>	30 <sup>+0.03</sup>	50	24	29	6.5	2.6	2.5	7	-	38	M24	-	-	0.20
SS200-2	0.7~2				0	0										0.21			
SS250-1	0.7~2.8	10	22	4.5	41 <sup>-0.010</sup>	41 <sup>+0.05</sup>	65	35	48	16	4.5	3.2	9	4	50	M35	-	M5	0.50
SS250-2	1.4~5.5				0	0										0.51			
SS350-1	2.0~7.6	17	25	6.5	49 <sup>-0.025</sup>	49 <sup>+0.05</sup>	89	42	62	19	4.5	3.2	16	6	65	M42	-	M6	1.20
SS350-2	3.5~15.2				0	0										1.22			
SS500-1	4.8~21.4	20	42	6.5	74 <sup>-0.05</sup>	74 <sup>+0.05</sup>	127	65	76	22	5.7	3.2	16	7	-	M65	M8	M8	3.00
SS500-2	9.0~42.9				0	0										3.10			
SS700-1	11.8~58.1	30	64	9.5	105 <sup>-0.075</sup>	105 <sup>+0.05</sup>	178	95	98	24	7.7	3.2	29	8	-	M95	M10	M10	6.70
SS700-2	22.8~110.6				0	0										7.20			